

ED-BKT-LA


Datasheet

by EDA Technology Co., Ltd

built: 2026-07-13

ED-BKT-LA

Wall-mounted bracket for ED-CM4SEN

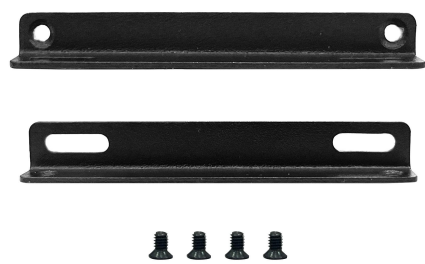


Specifications

Mechanical Characteristics	
Material	Galvanized steel sheet + Powder coating process
Color	Black
Weight	About 16g
Installation	Wall-mounted
Compatible Model	ED-CM4SEN

Dimensions

- Unit: mm
- Tolerance: 0.5-6±0.05, 6-30±0.1, 30-120±0.15

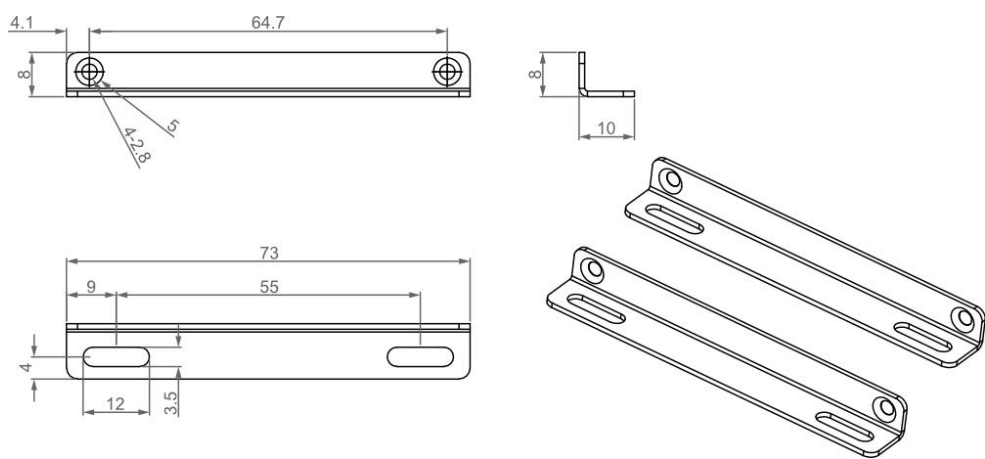

Ordering Code

Model	Description
ED-BKT-LA	Wall-mounted bracket for ED-CM4SEN

Package Contents

- 1 x ED-BKT-LA (with 4 M2.5*6 screws)


Installation

Parts List


NO.	Name	Quantity (PCS)
①	ED-BKT-LA (includes left and right brackets)	1
②	M2.5*6 screw	4
③	ED-CM4SEN (Not provided)	1

Steps

1. Use a Phillips screwdriver to unscrew the four M2.5 screws on the side of the ED-CM4SEN counterclockwise.

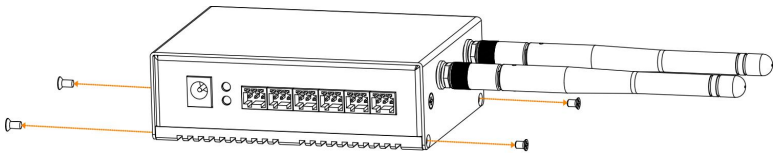

2. Align the left and right brackets of the ED-BKT-LA with the screw holes on both sides of the ED-CM4SEN, insert the four M2.5*6 screws, and tighten them clockwise with a Phillips screwdriver to secure the ED-BKT-LA to the sides of the ED-CM4SEN.

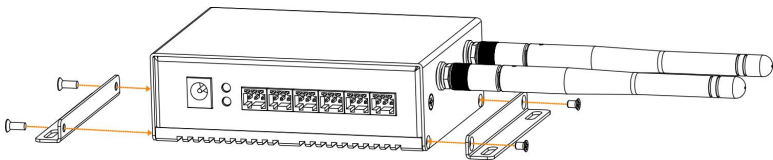

TIP

The "four M2.5*6 screws" in this step refer to the screws included as standard with the ED-BKT-LA.

3. Based on the spacing and diameter of the wall-mounting screw holes of the ED-BKT-LA left and right brackets (refer to the diagram below), drill holes in the wall accordingly, then proceed with wall-mounted installation of the device.

- Unit: mm
- Tolerance: 0.5-6±0.05, 6-30±0.1, 30-120±0.15

